



SM Series Saddle Assembly

*Protect utilities from sharp bends.
Eliminate broken wires or kinked hoses*

(248) 356-2839

FEATURES

- 1/4 saddle for end routings
- 1/3 saddle for good compact protection
- 1/2 saddle for complete protection
- Radii from 3 to 16 inches
- Widths from 2 to 12 inches
- Mounting on top, bottom or along radius
- Eye bolt mounting available
- Swivel/ Stationary mounting available
- Stationary mounting available
- Steel or Aluminum construction
- Strap slots at ends to hold utilities
- Use with SAA or SE series brackets
- Robot Dress assistance readily available
- 'Value added' services available


SM4– 1/4 Saddle



- | | | | | |
|---|---|---|--|---|
| Step 1
Choose
Material | Step 2
Choose Radius
(inches) | Step 3
Choose Width
(inches) | Step 4
Choose Mounting
Location | Step 5
Choose Mounting
Style |
| <ul style="list-style-type: none"> • Aluminum • Steel | <ul style="list-style-type: none"> • 3-16 inches | <ul style="list-style-type: none"> • 2-12 inches | <ul style="list-style-type: none"> • along radius | <ul style="list-style-type: none"> • Swivel/
Stationary • SAA pattern |

See reverse side for more information

SM3– 1/3 Saddle

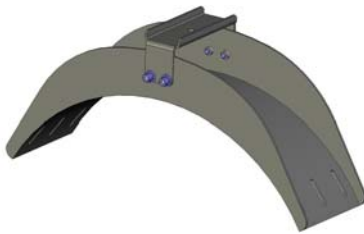

- | | | | | |
|---|---|---|--|---|
| Step 1
Choose
Material | Step 2
Choose Radius
(inches) | Step 3
Choose Width
(inches) | Step 4
Choose Mounting
Location | Step 5
Choose Mounting
Style |
| <ul style="list-style-type: none"> • Aluminum • Steel | <ul style="list-style-type: none"> • 3-16 inches | <ul style="list-style-type: none"> • 2-12 inches | <ul style="list-style-type: none"> • Top • Bottom
can be switched in field | <ul style="list-style-type: none"> • Eye bolt • Swivel/
Stationary • SAA pattern |

See reverse side for more information

SM2– 1/2 Saddle



- | | | | | |
|---|---|---|--|---|
| Step 1
Choose
Material | Step 2
Choose Radius
(inches) | Step 3
Choose Width
(inches) | Step 4
Choose Mounting
Location | Step 5
Choose Mounting
Style |
| <ul style="list-style-type: none"> • Aluminum • Steel | <ul style="list-style-type: none"> • 3-16 inches | <ul style="list-style-type: none"> • 2-12 inches | <ul style="list-style-type: none"> • Top • Bottom
can be switched in field | <ul style="list-style-type: none"> • Eye bolt • Swivel/
Stationary • SAA pattern |

See reverse side for more information

Notice: The information contained herein is, to the best of our knowledge, true, accurate and reliable. Since procedures and conditions under which these products may be used are beyond our control, no warranty, expressed or implied, is made to their performance.



Syndevco Inc.
ISO-9001-2000
Certificate # A10995

Syndevco Inc.

Sheet: 080930

24205 Telegraph Rd - Southfield MI 48034
Toll Free: (800) 356-2839 Local: (248) 356-2839 Fax: (248) 356-0928

visit us at: www.syndevco.com




SM Series Saddle Assembly

MOUNTING OPTIONS

Along Radius

Swivel/ Stationary

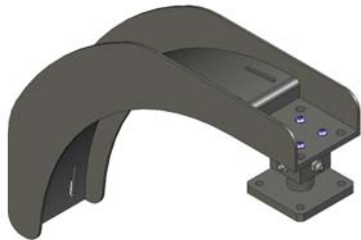

SAA Hole Pattern




Top Mount


Eye Bolt



Swivel/ Stationary

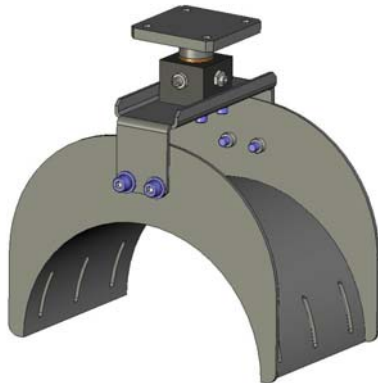

UHC Hole Pattern

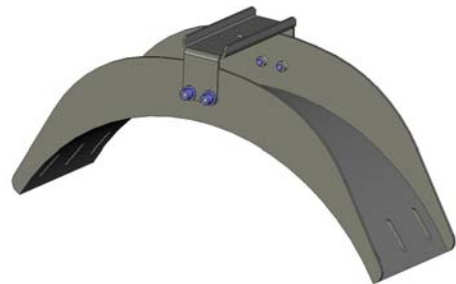


Bottom Mount

Swivel/ Stationary



UHC Hole Pattern

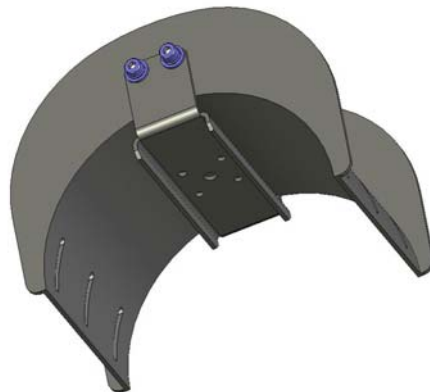

Notice: The information contained herein is, to the best of our knowledge, true, accurate and reliable. Since procedures and conditions under which these products may be used are beyond our control, no warranty, expressed or implied, is made to their performance.



Syndevco Inc.

24205 Telegraph Rd - Southfield MI 48034

Toll Free: (800) 356-2839 Local: (248) 356-2839 Fax: (248) 356-0928

visit us at: www.syndevco.com